

STRING 1

Luminous panels for wall mounting

WAP

Wall surface mounting,
wall semi-flush mounting parallel

Mounting depth
to the wall:
Mounting 43 mm
Semi-recessed 23 mm

Cut-out:
173 x 97 mm

WAP on-wall spacer kit
9069 00 0006




WAP 9076 xx 050x
WAP plus* 9076 xx 010x
WAP duo* 9076 09 0300
WAP hp 9076 0x 0800
WAP plus* hp 9076 0x 0200
WAP duo* hp 9076 0x 0400

UP

Semi-recessed wall mounting
parallel to flush-mounted box

1x flush-mounted box:
Ø = 68 mm / T = 60 mm




UP 9076 09 1000
UP hp 9076 0x 1100


DA/DE

Surface-mounted, recessed wall mounting 90°


Size 1, EW 10 m

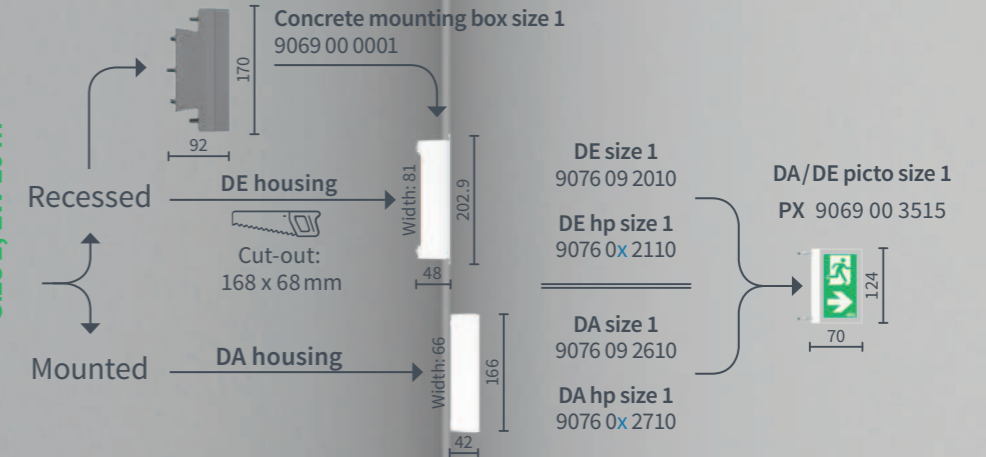


Size 2, EW 20 m

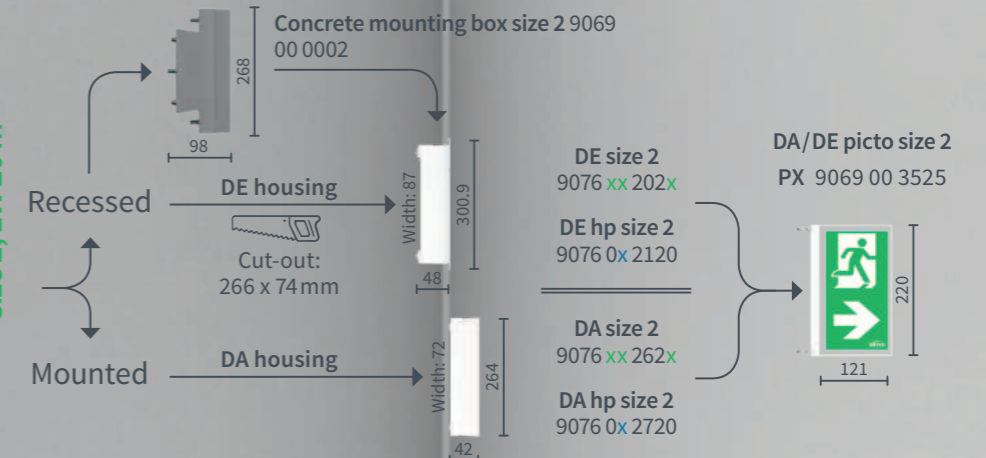


Size 3, EW 30 m

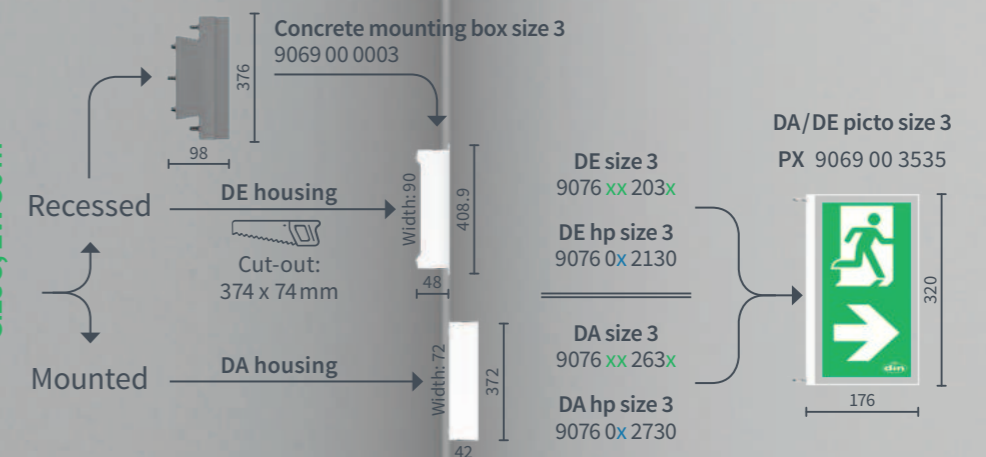

Size 2, EW 22 m

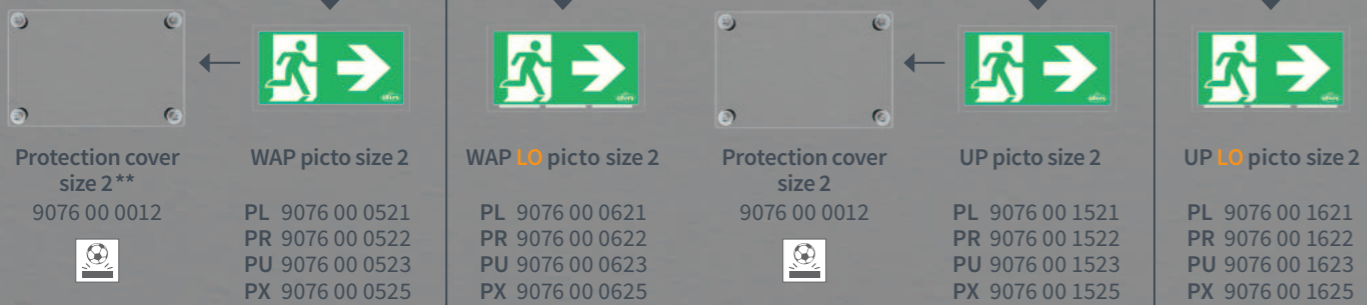

Size 3, EW 32 m

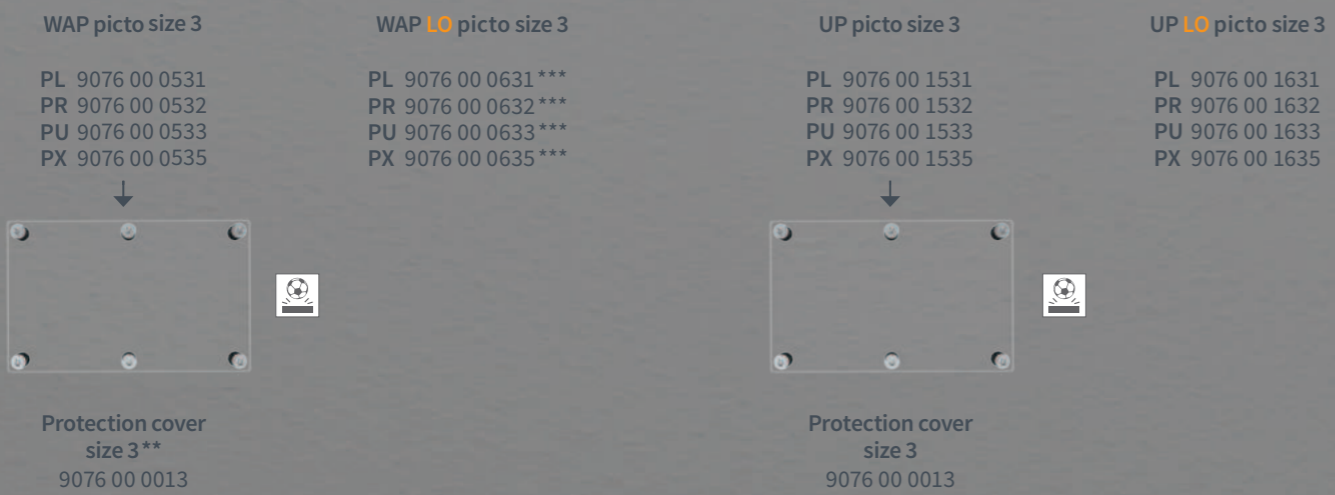

* Only wall surface mounting possible.


** Only possible for semi-recessed wall mounting without additional safety luminaire (plus, duo).

*** WAP LO picto size 3 panels in combination with the WAP plus hp housing not possible.

STRING 1

Luminous panels for ceiling mounting

DA/DE
Ceiling surface-mounted, recessed ceiling mounting

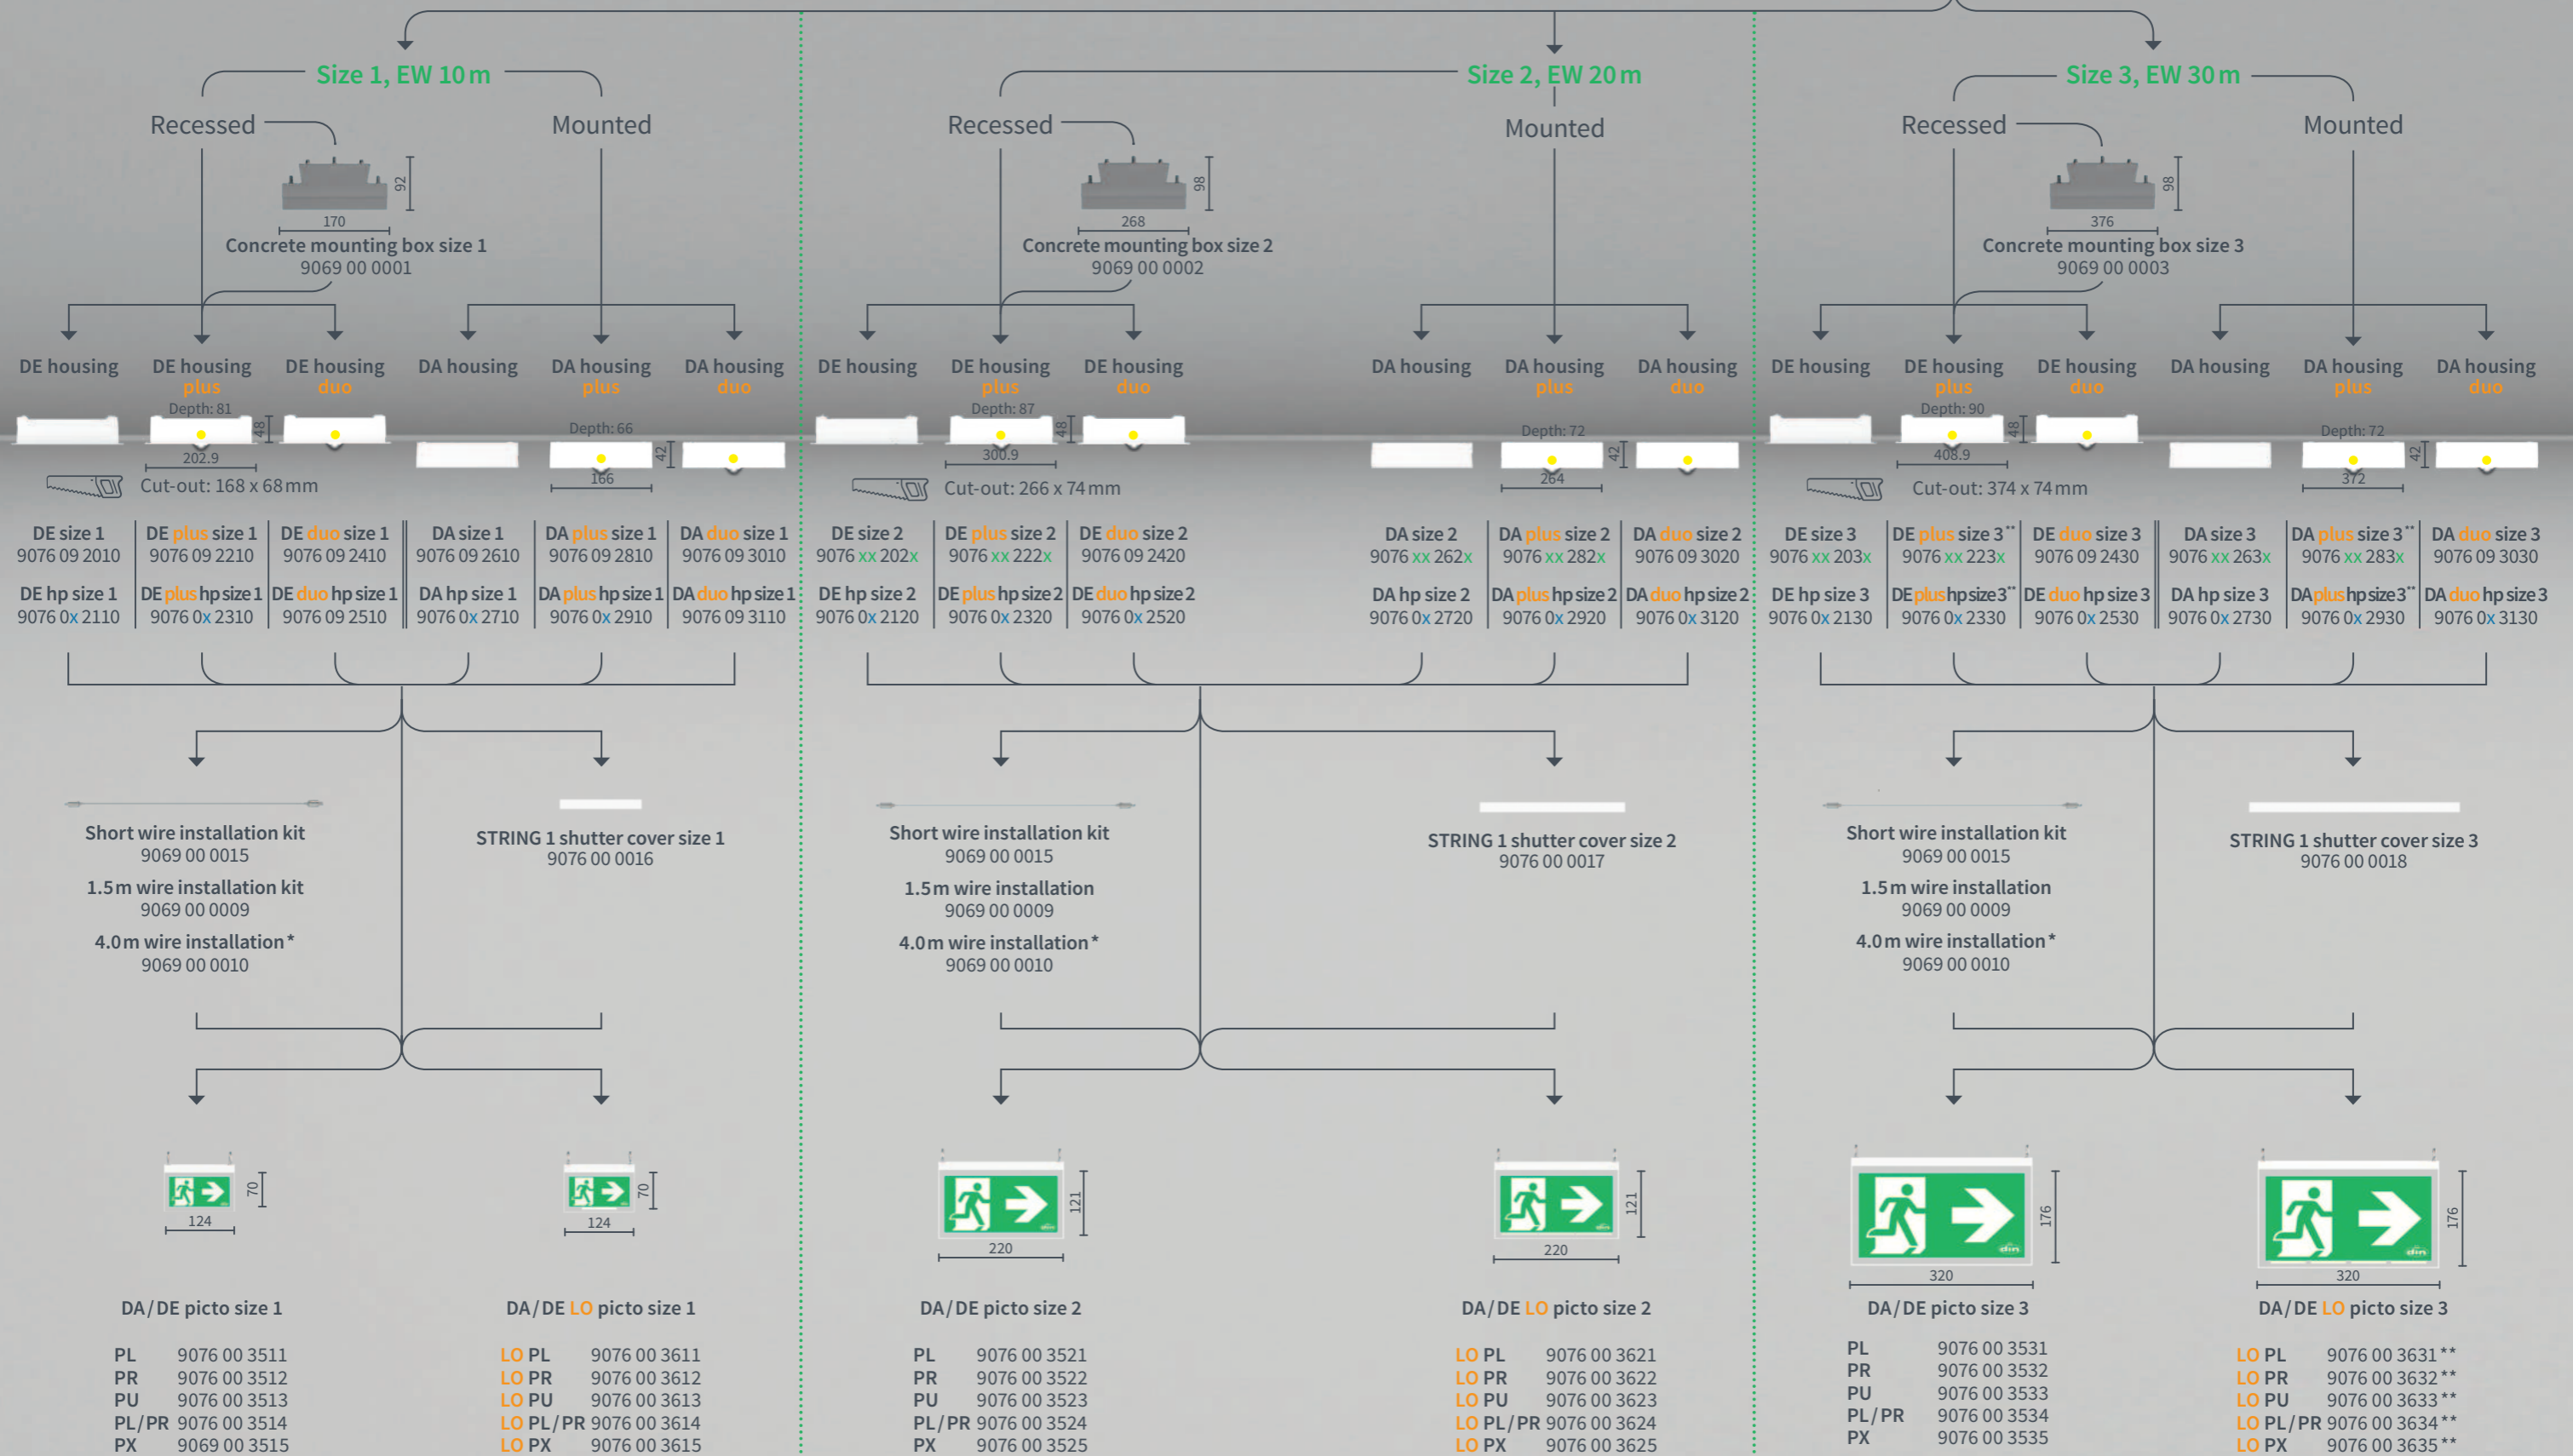

Notes:
Some of the illustrations are shown in a proportionally reduced or enlarged format.
All dimensions are given in mm. All specified detection distances correspond to EN1838 for backlit emergency signs.

RAL COLOURS On request, various components are available in special colours and in all RAL colours.
DIN 4844 hp in the article designation means DIN 4844 conformity.

* Wire installation kit 4.0m not approved for sc AT and sc CMR.
** DA/DE LO picto size 3 panels in combination with DA/DE plus hp housing not possible.

Emergency signs (RZ) with duo luminaires have an additional integrated safety light (ZSL). With RZ plus luminaires, the ZSL is always switched on. The ZSL of RZ duo panels can be switched on separately.

STRING



Safety luminaires for ceiling and wall mounting

STRIPE

Surface-mounted,
recessed wall mounting

Ceiling surface-mounted,
recessed ceiling mounting

EyeE
Recessed mounting

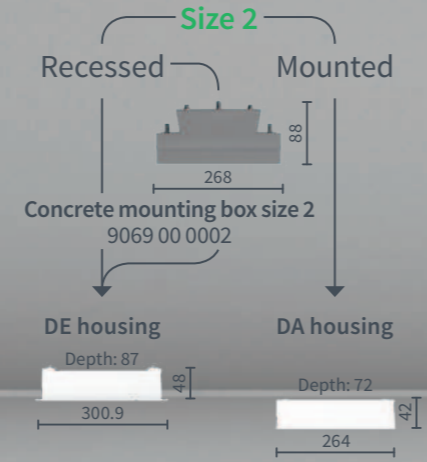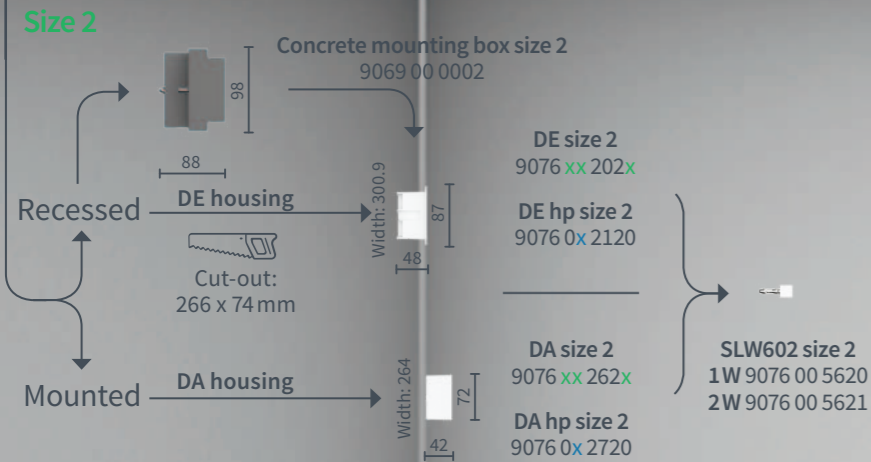

STRING 1 shutter cover size 2
9076 00 0017

- Short wire installation kit
9069 00 0015
- 1.5m wire installation kit
9069 00 0009
- 4.0 m* wire installation kit
9069 00 0010

220

SL2 size 2

- 1 W 9076 00 5020
- 2 W 9076 00 5021

EyeE 90

EyeE Pro

Drill hole: Ø 12.5 - 14 mm

Drill hole: Ø 35 mm

Recessed depth: See supply modules*

AP 3000K
9070 xx 0100

AP 4000K
9070 xx 020x

EyeE 90
Round mounting kit
9070 00 0003

EyeE 90
Rectangular mounting kit
9070 00 0004

RG 3000K
9070 09 1200

RG 4000K
9070 09 1300

R 3000K
9070 09 1000

R 4000K
9070 09 1100

3 TS 3000K
9070 09 1400

3 TS 4000K
9070 09 1500


3 TS IP65 4000K
9070 09 1600

Composition of the article numbers


- Type of monitoring
07 = scAT
11 = scCMR
- Nominal operating time for self-contained luminaires (sc)
0 = scCMR 1-8 h or in the case of a centrally supplied luminaire
1 = scAT 1 h
2 = scAT 2 h
3 = scAT 3 h
4 = scAT 8 h
- Type of monitoring
3 = ILS (230 V monitored, for DBS systems)
9 = PLC24 (24 V monitored, for SU systems)

* Supply modules for recessed luminaires


1: H-Modul 230V and PLC24
Recessed depth: >75 mm




2: H-Modul scAT
Recessed depth: >75 mm



3: H-Modul scCMR
Recessed depth: >75 mm



PLC24 IP65 Elektronik EyeE Pro 3 TS
Recessed depth: >50 mm

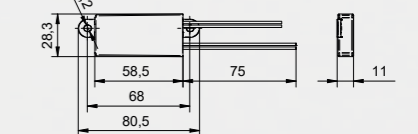

Access to the top of the ceiling through inspection openings is required when installing the luminaire EyeE 90 AP and positioning the associated COLOURS supply module.

Notes:
Some of the illustrations are shown in a proportionally reduced or enlarged format.
All dimensions are given in mm.

RAL COLOURS On request, various components are available in special colours and in all RAL colours.

** Wire installation kit 4.0 m not approved for sc AT and sc CMR.